

Original citation:

Ramisetti, Srinivasa B., Borg, Matthew K., Lockerby, Duncan A. and Reese, Jason M.. (2017)
Liquid slip over gas nanofilms. *Physical Review Fluids* .

Permanent WRAP URL:

<http://wrap.warwick.ac.uk/90704>

Copyright and reuse:

The Warwick Research Archive Portal (WRAP) makes this work by researchers of the University of Warwick available open access under the following conditions. Copyright © and all moral rights to the version of the paper presented here belong to the individual author(s) and/or other copyright owners. To the extent reasonable and practicable the material made available in WRAP has been checked for eligibility before being made available.

Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge. Provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.

Publisher statement:

© 2017 American Physical Society

Published version: <https://journals.aps.org/prfluids/>

A note on versions:

The version presented here may differ from the published version or, version of record, if you wish to cite this item you are advised to consult the publisher's version. Please see the 'permanent WRAP url' above for details on accessing the published version and note that access may require a subscription.

For more information, please contact the WRAP Team at: wrap@warwick.ac.uk

Liquid slip over gas nanofilms

Srinivasa B. Ramiseti,^{1,*} Matthew K. Borg,¹ Duncan A. Lockerby,² and Jason M. Reese¹

¹*School of Engineering, University of Edinburgh, Edinburgh EH9 3FB, UK*

²*School of Engineering, University of Warwick, Coventry CV4 7AL, UK*

We propose the rarefied gas-cushion model (r-GCM), as an extended version of the gas-cushion model (GCM), to estimate the apparent slip of water flowing over a gas layer trapped at a solid surface. Nanobubbles or gas nanofilms may manifest rarefied gas effects, and the r-GCM incorporates kinetic boundary conditions for the gas component in the slip Knudsen regime. These enable an apparent hydrodynamic slip length to be calculated given the gas thickness, the Knudsen number and the bulk fluid viscosities. We assess the r-GCM through non-equilibrium molecular dynamics (NEMD) simulations of shear-driven liquid flow over an infinite gas nanofilm covering a solid surface, from the gas slip regime to the early transition regime, beyond which NEMD is computationally impractical. We find that, over the flow regimes examined, the r-GCM provides better predictions of the apparent liquid slip, and retrieves both the GCM and the free-molecular behaviour in the appropriate limits.

Keywords: Molecular dynamics, Gas/liquid flow, Non-continuum effects, Nanobubbles

* s.ramiseti@ed.ac.uk

I. INTRODUCTION

A fundamental understanding of the flow of fluids over solid surfaces is important in many emerging technologies. Examples include: self-cleaning surfaces, de-icing coatings for aerospace control surfaces, and drag-reducing/anti-fouling marine coatings. The classical no-slip fluid boundary condition is not necessarily applicable at micro/nano scales, and the velocity slip at a surface is required in order to predict the overall flow behaviour. The Navier boundary condition can describe the finite slip velocity at a planar wall, and is given by $V_{\text{wall}} = b \epsilon|_{\text{wall}}$, where $\epsilon|_{\text{wall}} = dV/dy$ is the gradient of the velocity profile normal to the wall (in the y -direction) and b is the slip length (which is the normal distance extrapolated into the wall at which the velocity would be zero). The slip length is a phenomenological parameter that determines the characteristics of the surface/fluid friction.

Several experimental [1, 2] and theoretical studies [3, 4] have suggested that the presence of surface nanobubbles and gas nanofilms (see Figure 1(a)) may be responsible for large slip at liquid/solid interfaces. Vinogradova [5] has proposed the *gas-cushion model* (GCM) to calculate the apparent slip length b at a liquid/solid interface in the presence of a lubricating gas film (see Figure 1(b)). The slip length in this model is given by

$$b|_{\text{GCM}} = (C_\mu - 1) Y_g, \quad (1)$$

where the viscosity contrast $C_\mu = \mu_l/\mu_g$ is the ratio of the liquid to the gas viscosities, and Y_g is the gas film thickness. This simple model follows from the assumption of a 1D steady parallel flow, and continuity of stress and velocity (no slip) at both the solid/gas and gas/liquid interfaces. The GCM also assumes that there is a non-zero mass flow rate in the gas film, which may not be the case. A generalization of the GCM to a superhydrophobic surface was therefore proposed by Nizkaya *et al.* [6] to account for zero mass flow rate in the entrapped gas phase, which may have an impact on the overall slip [7]. Theoretical predictions using equation (1) seem to agree well with experiments when the characteristic length scale of the gas film (i.e. Y_g) is much larger than the mean free path of the lubricating gas molecules. For instance, Nizkaya *et al.* [8] used atomic force microscopy to confirm the GCM theoretical prediction by measuring the local slip length in the gas regions. In their experiments the gas film thickness $Y_g = 1.9 \mu\text{m}$ is much larger than the gas mean free path λ (e.g., at standard atmospheric conditions, air molecules have $\lambda = 68 \text{ nm}$ [9]), which is given by

$$\lambda = \frac{\mu_g}{\rho_g} \sqrt{\frac{\pi}{2R_s T}}, \quad (2)$$

where R_s is the specific gas constant, and T , ρ_g are the temperature and mass density of the gas, respectively. The degree of gas rarefaction can be expressed by the Knudsen number $\text{Kn} = \lambda/Y_g$, which in their experiment is 0.04, indicating the gas is in the early slip regime. The GCM is commonly used to provide slip conditions at liquid/vapour interfaces to calculate the effective slip length of flows over surfaces consisting of alternating hydrodynamic slip boundary conditions [10, 11]. We refer the reader to other recent articles [12, 13] for various definitions of slip length.

In the limiting case where $Y_g \ll \lambda$, de Gennes [14] estimated the slip length by equating the liquid viscous stress to the thermal stress in a gas such that

$$b|_{\text{dG}} = \left(\frac{\mu_l}{Y_g \rho_g v_x} - 1 \right) Y_g, \quad (3)$$

where $v_x = \sqrt{k_B T / 2\pi m}$ is the tangential velocity component of a gas molecule colliding with an interface, k_B is the Boltzmann constant, and m is the mass of a gas molecule.

By using equation (2), and expressing v_x in terms of R_s , equation (3) can be recast in a form similar to the GCM equation (1), i.e.

$$b|_{\text{dG}} = (2\text{Kn}C_\mu - 1) Y_g. \quad (4)$$

The major limitation of the de Gennes model is that it is only applicable in the free-molecular regime (i.e. $\text{Kn} > 10$), so it does not provide a full description of the slip length in all Knudsen regimes [15]: the de Gennes model does not retrieve the predictions of the GCM at lower Kn [15].

While slip length predictions from the GCM are perfectly valid in the continuum regime ($\text{Kn} < 0.001$) and perhaps in the early slip regime ($0.001 < \text{Kn} < 0.1$), it is still not clear how the slip length varies when the gas is in the transition regime ($0.1 < \text{Kn} < 10$). In this paper, we propose a modification to the GCM to include thermodynamic non-equilibrium gas effects in any gas film that interfaces the liquid/solid regions in a shear flow. We term this new model the *rarefied gas-cushion model* (r-GCM). The r-GCM adopts the same basic assumptions (i.e. 1D parallel flow and continuity of stress) as the GCM, but relaxes the condition that the velocity should also be continuous — instead,

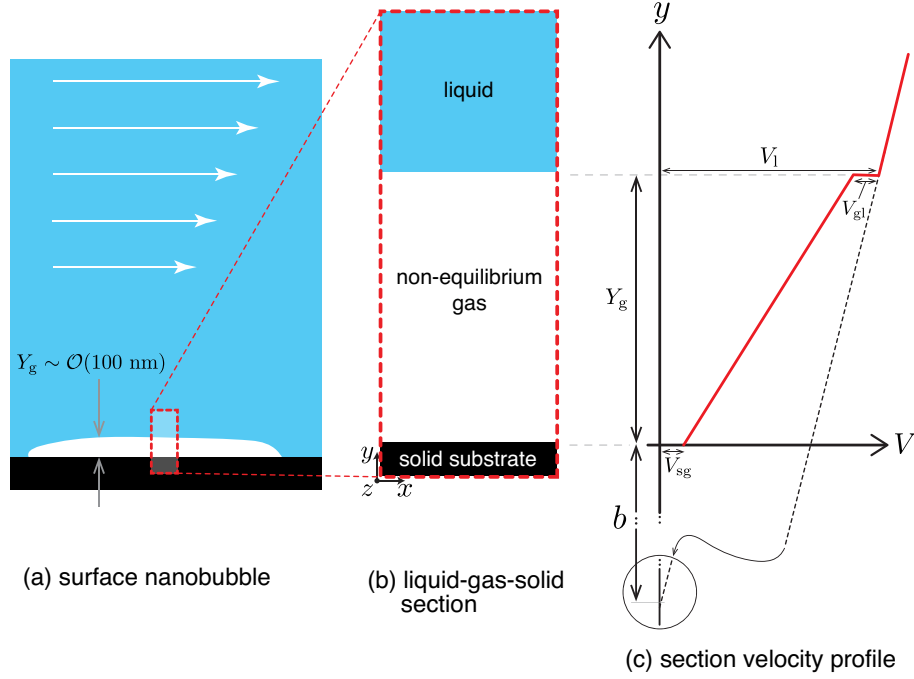


FIG. 1. Schematic of (a) a surface nanobubble at the liquid/solid interface, (b) a zoomed view showing the liquid/gas/solid section, and (c) the proposed velocity profile in the liquid/gas/solid section, with gas slip velocities indicated at both the solid/gas and gas/liquid interfaces. Note, Y_g represents the local nano bubble thickness, which is modelled in (b) as a constant thickness film of height Y_g . The effect of recirculation inside the bubble will be discussed in Section II.

velocity slips at the two interfaces are modelled by the classical Maxwell slip boundary condition.

II. RAREFIED GAS-CUSHION MODEL

Figure 1(c) shows a schematic of the steady-state velocity profile in 1D throughout a liquid/gas/solid system with infinite dimension in the direction parallel to the surface, assuming velocity-slip effects (due to rarefaction) occur in the gas layer. We assume that there is slip at both the solid/gas and gas/liquid interfaces, and that there are two different strain rates in the liquid and the gas due to their contrasting viscosities. At steady-state, the shear stress is constant and equal in the gas and liquid layers. We adopt a simple velocity slip model, so this means our new GCM is strictly only valid for small Kn (< 0.1); however, in Section III, we investigate its performance beyond this regime to test its qualitative predictive capability.

We start by defining the boundary conditions for the gas layer (as illustrated in Figure 1(c)). The slip velocity magnitudes at the solid/gas (sg) and gas/liquid (gl) interfaces can be expressed using Maxwell boundary conditions [16], assuming an isothermal system:

$$V_{sg} = \frac{2 - \sigma_{sg}}{\sigma_{sg}} \lambda \frac{\|\tau_{xy}\|}{\mu_g}, \quad (5)$$

$$V_{gl} = \frac{2 - \sigma_{gl}}{\sigma_{gl}} \lambda \frac{\|\tau_{xy}\|}{\mu_g}, \quad (6)$$

where σ_{sg} , σ_{gl} are the tangential momentum accommodation coefficients, and τ_{xy} is the shear stress (which is constant in the y -direction). For simplicity, we take $\sigma_{sg} \approx 1$ and $\sigma_{gl} \approx 1$ as experimentally typical values [17].

As illustrated in Figure 1(c), the apparent slip length can be extrapolated from the strain rate in the liquid (the

dotted line in the figure), i.e.

$$b|_{\text{r-GCM}} = \frac{\mu_l V_l}{\tau_{xy}} - Y_g, \quad (7)$$

where V_l is the velocity of the liquid at the gas/liquid interface:

$$V_l = V_{\text{sg}} + V_{\text{gl}} + \frac{\tau_{xy}}{\mu_g} Y_g. \quad (8)$$

By substituting equations (5), (6) and (8) into equation (7), we obtain the apparent slip length prediction for the r-GCM:

$$b|_{\text{r-GCM}} = (C_\mu (2\text{Kn} + 1) - 1) Y_g. \quad (9)$$

Inspection of this equation reveals that in the continuum limit ($\text{Kn} \rightarrow 0$) the GCM model is retrieved, and in the free molecular limit ($\text{Kn} \gg 1$) the de Gennes equation is retrieved.

The rest of this paper focuses on using molecular simulations to validate the theoretical slip length obtained using equation (9) for infinite gas nanofilms. However, for completeness we include here a note on extending our model to account for practical nanofilms, which are of finite size (e.g. a surface nanobubble, or entrapped gas in a nanotextured surface). For these cases, the slip length prediction in equation (9) needs to be recast to account for a back flow in the gas from consideration that there is no leakage of gas from the sides, which results in a net zero mass flux across the film, as suggested by Nizkaya *et al.* [18]. With this assumption, the derivation in the Appendix shows that equation (9) should be modified to

$$b^*|_{\text{r-GCM}} = \left[C_\mu (2\text{Kn} + 1) \left(\frac{1 + 6\text{Kn}}{4 + 12\text{Kn}} \right) - 1 \right] Y_g. \quad (10)$$

In the continuum limit ($\text{Kn} \rightarrow 0$), equation (10) retrieves the 1/4 pre-factor in the local slip length, as found by Nizkaya *et al.* [18], which means the slip is 4 times smaller in the finite nanofilm case. Equation (10) shows that for increasing Knudsen numbers, the reduction in local slip at gas/liquid interfaces increases to around 2 times in the free molecular regime. Verification of this relation using molecular dynamics simulations of flows over nanobubbles would require huge computational resources, and is beyond the scope of this present work.

III. MOLECULAR SIMULATIONS

To test the new r-GCM model, equation (9), we perform four non-equilibrium molecular dynamics (NEMD) simulations (cases A–D) with varying Knudsen numbers ranging across the slip and transition regimes, as listed in Table I. We choose combinations of gas densities (ρ_g) and film thicknesses (Y_g) to give us a well-spaced Knudsen number range. All the simulations have a setup similar to the case shown in Figure 2(a). This consists of a solid molecular bounding wall of fixed thickness ~ 0.7 nm, a gas film of thickness Y_g , and a liquid layer of fixed thickness ~ 10 nm. The size of the computational domain in the x and z directions is $L_x = L_z = 4.62$ nm. The liquid region is decomposed into three zones: near-interface, bulk/measurement, and forcing zones. For computational efficiency we model the system as periodic in the x - and z -directions but non-periodic in the y -direction. The top boundary in contact with the liquid is a zero-shear-stress specular wall: molecules colliding with this boundary conserve tangential velocity, while their normal components are reversed, i.e. perfect slip. The system slip reference plane is taken in all cases as the first layer of atoms of the solid substrate, i.e. at $y=0$.

Water is chosen as the contact liquid because of its relevance to marine engineering and recent advances in superhydrophobic drag-reducing surfaces. We take nitrogen as the gas, because it is the least soluble in water of all the species in air [19]. Platinum is chosen as the solid bounding wall in this work because its wetting characteristics are known both experimentally [20] and through molecular dynamics simulations [21, 22].

Newton's equations of motion for all molecules in the system are integrated using the velocity-Verlet scheme, with a time-step of 2 fs. For the molecular interactions, we use the (12-6) Lennard Jones (LJ) potential and the smoothly-truncated Coulomb potential for charge sites, i.e.

$$U(r_{ij}) = 4\epsilon \left[\left(\frac{\sigma}{r_{ij}} \right)^{12} - \left(\frac{\sigma}{r_{ij}} \right)^6 \right] + \frac{1}{4\pi\epsilon_0} \left(\frac{q_i q_j}{r_{ij}} - \frac{q_i q_j}{r_{\text{cut}}} + (r_{ij} - r_{\text{cut}}) \frac{q_i q_j}{r_{\text{cut}}^2} \right), \quad (11)$$

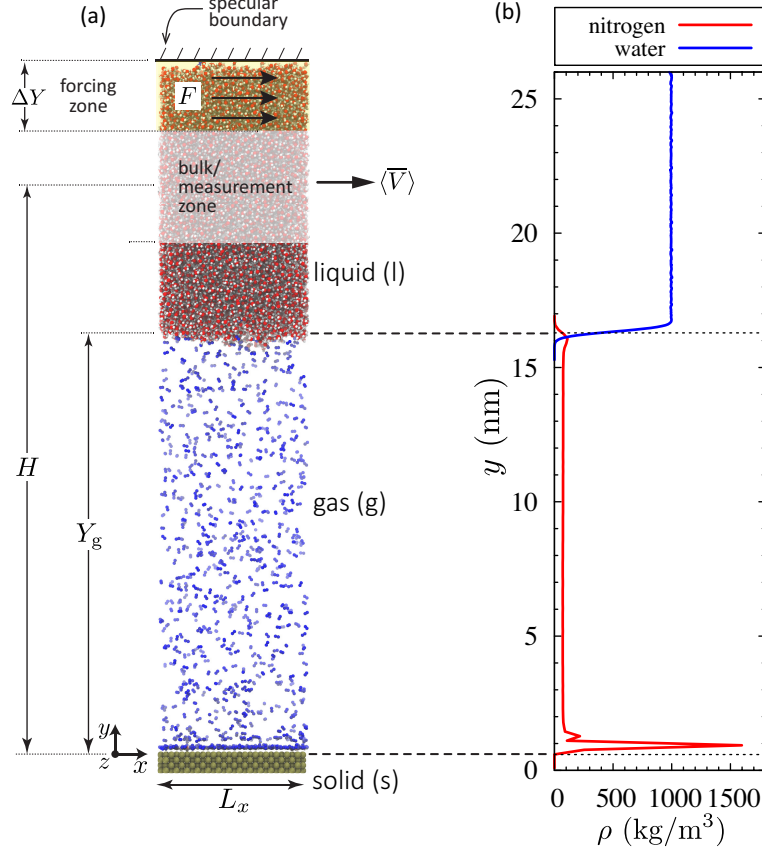


FIG. 2. (a) The NEMD liquid/gas/solid simulation setup. Periodic boundary conditions are set in the x - and z -directions. The flow is initiated along the x -direction by imposing a uniform force F to all liquid (water) molecules in the forcing zone. The average liquid velocity $\langle \bar{V} \rangle$ is measured at height H from the top layer of atoms ($y=0$) of the solid surface (platinum); Y_g is the gas layer thickness, which is the distance measured between the location where the liquid and gas densities reach 50% of their bulk densities and the top layer of the solid substrate. (b) Typical water and nitrogen density profiles along the y direction for simulation case A.

Cases	Kn	Y_g	ρ_g	μ_g [NEMD]	μ_g [NIST]	P_g [NEMD]	P_g [NIST]
	(-)	(nm)	(kg/m ³)	(μ Pa s)	(μ Pa s)	(MPa)	(MPa)
A	0.07	15.7	71.3	19.0	19.05	6.39	6.33
B	0.17	19.0	23.7	18.74	18.23	2.21	2.1
C	0.34	5.9	40.2	17.30	18.49	3.6	3.56
D	0.41	5.9	32.2	17.8	18.36	2.86	2.85

TABLE I. NEMD simulation data for the four cases (A–D) with different gas Knudsen numbers as shown in the second column. The gas layer thicknesses and bulk densities are shown in the third and fourth columns, respectively. The fifth and sixth columns show the gas bulk viscosities extracted from our NEMD simulations and the NIST database [23], respectively. The seventh and eighth columns show the gas bulk pressures from our NEMD simulations and the NIST database [23], respectively.

where $U(r_{ij})$ is the total pair potential energy, r_{ij} is the distance between atoms i and j , ϵ and σ are the LJ energy and distance parameters, respectively, $r_{\text{cut}} = 1$ nm is the cutoff radius used in all our simulations for both the LJ and the Coulomb force calculations, ϵ_0 is the dielectric constant, and q_i , q_j are the atomic charges. Interactions between atomic sites of different molecules are derived from the Lorentz-Berthelot mixing rules [27].

In all our simulations, we use the interatomic potential parameters listed in Table II. Water is modelled using the rigid TIP4P/2005 force field [24], which consists of four sites: an oxygen atom (O), two positively charged hydrogen sites (H), and a negatively charged massless site (M). The H-O-H bond angle and the O-H bond length in a water

molecule	atom	ε (kJ mol ⁻¹)	σ (nm)	q (e)
water	H	0	0	0.5564
	O	0.775	0.315	0
	M	0	0	-1.1128
nitrogen	N	0.299	0.33	-0.5075
	M	0	0	1.015
platinum	Pt	66.94	0.247	0

TABLE II. Lennard-Jones and Coulomb potential parameters for water [24], nitrogen [25], and platinum [26] molecules in our NEMD simulations.

molecule is fixed at 104.53° and 0.095 nm, respectively, using Hamilton’s quaternions. A three site model is used for nitrogen gas [25], with two nitrogen atoms (N) and a positively charged massless site (M). The N-N bond length is fixed at 1.098 nm. The platinum substrate is modelled using FCC rigid atoms, but we list the LJ interactions for platinum from [26] in Table II for completeness, as these are needed for the Lorentz-Berthelot mixing rules.

The steps of the simulation procedure are as follows. First, the lattices of the solid, gas and liquid regions are initialised and allowed to equilibrate at a temperature of $T=298$ K using a Berendsen thermostat. High gas adsorption occurs at the platinum surface during the equilibration step, which makes it very challenging to know beforehand how many gas molecules are needed in the initial gas lattice in order to produce the target gas density in the bulk zone of the gas film. To achieve the target gas and liquid bulk densities, we introduce a second simulation step to tune the densities using the FADE insertion/deletion protocol [28], while applying a simple velocity constraint procedure [29] on the water region to prevent the gas film departing from its target thickness.

The viscosity of water for the TIP4P/2005 model [30] at the set density $\rho_W=1000$ kg/m³ is $\mu_l = 0.855 \times 10^{-3}$ Pa.s, which is needed for the slip length calculations. The viscosities of nitrogen gas μ_g at 298 K are calculated from our NEMD simulations; our values are found to be in good agreement with the National Institute of Standards and Technology (NIST) database [23], as shown in Table I. Figures 2(a) and (b) show an example of one of the test cases (case A) at the end of the second simulation step. There is clearly a gas adsorption layer at the platinum surface. The bulk gas density and bulk gas layer thickness measured at the end of the equilibrium step are close to the prescribed values shown in Table I. Note that our measurements of the bulk density (for both liquid and gas) and viscosity are in regions away from the interfaces, and do not contain any adsorption layer effects. At steady state, and by Newton’s third law, the pressure in the gas balances the pressure in the water. Using the TIP4P/2005 water model with a cut-off of 1 nm, in conjunction with non-periodic boundary conditions in the y -direction, produces < 0.5% error in the water density and < 20% error in the measured pressure between our NEMD simulations and experiments [23], which could be improved at a computational cost by increasing the intermolecular potential cut-off distance.

After the system is equilibrated, the flow simulation proceeds by imposing a constant shear stress of $\tau_{xy}=0.3$ MPa to the liquid molecules in the forcing zone via a uniform force F given by:

$$F = \frac{\tau_{xy}}{\rho_n \Delta Y}, \quad (12)$$

where $\Delta Y = 3.06$ nm is the forcing zone thickness, and ρ_n is the liquid number density in the forcing zone. This value for τ_{xy} is chosen to be large enough to produce a reasonable signal-to-noise ratio in the particle ensemble, but well below the magnitude at which the strain varies non-linearly with stress, and also below the critical stress at which the slip length diverges.

A velocity-unbiased Berendsen thermostat is applied in bins of width 0.8 nm within the liquid region, and one bin in the gas region, for the entire duration of the simulation. After the system reaches a steady-state (after ~60–100 ns), which is dependent on each problem, the simulation is run for a further period (~10–20 ns) in order to measure the gas bulk densities and pressures (see Table I) as well as the average velocity $\langle \bar{V} \rangle$ in the bulk zone of the liquid region. The apparent slip-length is then calculated using:

$$b = \frac{\mu_l \langle \bar{V} \rangle}{\tau_{xy}} - H, \quad (13)$$

where μ_l is the known liquid viscosity in the bulk zone and H is the known height from the reference plane ($y=0$) to the midpoint of the bulk measurement zone, as shown in Figure 2(a).

All our simulations were performed using the mdFoam+ solver [29, 31], a highly parallelised molecular dynamics code

Case	b (nm)			e (%)	
	NEMD	GCM	r-GCM	GCM	r-GCM
A	758 (± 3)	689	789	9.10	4.09
B	1290 (± 7)	872	1175	32.40	8.90
C	465 (± 4)	265	444	43.01	4.51
D	523 (± 9)	267	490	48.94	6.30

TABLE III. Apparent slip length results for the four cases. The second, third, and fourth columns show the slip lengths calculated from the NEMD simulations, the standard GCM equation (1), and the r-GCM equation (9). The values in the brackets in the second column indicate upper and lower 95% confidence limits. The last two columns indicate the absolute % errors with respect to our NEMD results.

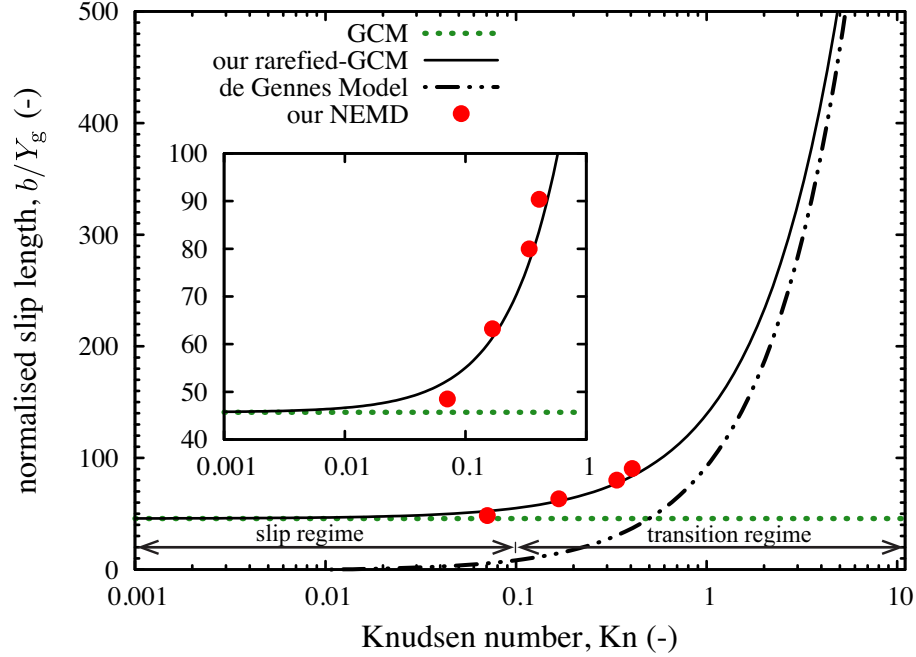


FIG. 3. Variation of the normalised apparent slip lengths with Knudsen number in our NEMD results; comparison with predictions from the GCM equation (1) and our proposed r-GCM equation (9). The theoretical slip lengths are calculated using a gas dynamic viscosity of 1.82×10^{-3} Pa s, which is the average of the gas viscosities of the four cases, at 298 K. Note: error bars in the NEMD results are much smaller than the size of the symbols so have been omitted from this graph.

that is implemented within the open-source OpenFOAM C++ libraries. These simulations were run on ARCHER, the UK's national supercomputer.

IV. RESULTS AND DISCUSSION

The slip lengths predicted by our four NEMD simulations (cases A–D, with increasing gas Kn) at steady-state are compared with calculations from the GCM (equation (1)) and our proposed r-GCM (equation (9)) in Table III, in the second, third, and fourth columns, respectively. The values in the brackets in the second column indicate upper and lower 95% confidence limits due to the standard error in $\langle \bar{V} \rangle$. The last two columns are the absolute percentage error of the theoretical slip lengths with respect to the NEMD slip length, which are calculated using:

$$e = \left| \frac{b_{\text{NEMD}} - b_{\text{theor}}}{b_{\text{NEMD}}} \right| \times 100\%, \quad (14)$$

where b_{NEMD} is the apparent slip length calculated from our NEMD simulations and b_{theor} is the theoretical apparent slip length prediction from either the r-GCM or the GCM. We observe that the error in the slip length predictions of the GCM increases with Kn in the transition regime (~ 10 – 50% for these four cases), while our r-GCM error remains roughly constant at 4–8%.

Figure 3 synthesises the results presented in Table III: the normalised apparent slip lengths (b/Y_g) are plotted against Kn for the four cases (A–D) using molecular dynamics (filled-circle), the r-GCM (solid-line), the GCM (dotted-line) and the de Gennes model (dot-dashed-line). Note, for the three theoretical calculations we use the average gas viscosity across all our cases (see fifth column in Table I); this approximation is reasonable as we have verified that the slip lengths do not change significantly when individual gas viscosity values are used. As can be seen in Figure 3, the r-GCM is in good agreement with our NEMD results in the transition regime, and also converges to the GCM slip length in the slip and continuum limit. These molecular dynamics simulation results indicate the usefulness of our simple rarefied gas-cushion model, as well as the important role that rarefaction (through Kn) plays in determining the slip properties of interfacial and multiphase problems at the micro/nano scales. Our r-GCM also agrees very well with the de Gennes model towards the free-molecular regime, with a 4% difference between the two models at Kn = 10 that decreases to only 0.5% at Kn = 100.

All our NEMD simulations in this paper are computationally expensive, requiring around 60–100 ns of problem time, and 30–60 days of computational time on 48 processors. For Knudsen numbers below the transition regime (i.e. in the continuum regime and early slip regime) simulations are much more computationally costly, since a decrease in Knudsen number requires the gas film thickness to be increased, which increases the evolution time-scales. For instance, if Kn=0.02 (corresponding to the early slip regime) and the gas thickness is 100 nm ($\rho_g = 40 \text{ kg/m}^3$), the problem time to reach steady-state would be ~ 600 ns. A similar difficulty is encountered at higher Knudsen numbers (in the upper transition regime); at Kn=4 and for a gas thickness of around 15 nm ($\rho_g = 1.2 \text{ kg/m}^3$), there are only about 10 gas molecules in the gas film (which opens up questions on the stability/existence of the gas layer), and in any case the problem time to reach steady state can be estimated to be around 1 μs . This has prevented us from using NEMD simulations to investigate how the r-GCM performs in the upper range of the transition regime and into the free-molecular regime.

To complete our analysis, we briefly examine the cause of the small errors ($\sim 5\%$) seen between our r-GCM and the NEMD results. Figure 4 shows the steady-state velocity profiles along the y -direction extracted from our NEMD simulations, with the expected steady-state velocity profiles from the GCM and the r-GCM. As expected, at low Knudsen numbers (i.e. in the slip regime) our NEMD results are in good agreement with the r-GCM, although the GCM solution is still not a bad prediction. This demonstrates why the GCM might still be a good estimator of slip length in the early parts of the slip regime. While the r-GCM results seem to agree better with our NEMD results in the transition regime than the GCM results do, we observe that the deviations are due to the non-linear strain-rate within the gas, and possibly also the assumption of $\sigma_{\text{sg}} = \sigma_{\text{gl}} \approx 1$. The non-linear velocity profile is due to the well-known Knudsen layer phenomenon; in order to enable higher accuracy in these theoretical gas slip length models one would need in the future to incorporate more sophisticated results from kinetic theory into the model.

We now use the r-GCM equation (9) and the gas mean free path equation (2) to make predictions for a range of typical gas layer thicknesses and gas densities, without resorting to additional expensive NEMD simulations. From the discussion above, we expect around 5% error in our calculations. The literature concerning surface nanobubbles is still in its infancy [32], and there is uncertainty about the actual pressures and densities in the confined gas. We choose three sets of density ranges for gas films at the nanoscale ($Y_g < 100 \text{ nm}$) which may cover the operating conditions of these gas bubbles or thin films: the atmospheric density range ($\rho_g = 0.5 - 3 \text{ kg/m}^3$), a medium density range ($\rho_g = 3 - 30 \text{ kg/m}^3$) and a much higher density range ($\rho_g = 30 - 300 \text{ kg/m}^3$) as observed by Peng *et al.* [33] and very recently by Che *et al.* [34] in their molecular dynamics studies of nitrogen gas adsorption at a water/graphite interface. Contour plots of Knudsen number and apparent slip lengths are in Figure 5 for these three sets of densities. Our first observation is that across these gas densities the operating conditions have rarefied gas features (Figures 5(a)–(c)). In the low density range, the flow is predominantly in the transition regime (Figure 5(a)), which means the r-GCM (Figure 5(d)) predicts much larger slip lengths than the standard GCM (Figure 5(g)). For example, a gas film with a height 100 nm and $\rho_g = 1.5 \text{ kg/m}^3$ has a Knudsen number of ~ 0.5 and produces an apparent slip length of 9.4 μm , which is twice the GCM prediction. As the gas density increases, the Knudsen number decreases; in the medium density range, the transition regime still covers 50% of the operating conditions, so the r-GCM is still required to make accurate predictions. In higher density conditions, the gas is less rarefied and the slip Knudsen regime is now dominant, meaning that the GCM and r-GCM results are very similar — compare Figure 5(f) with Figure 5(i).

Note that the slip length can be very large when the lubricating gas is in the transition regime (see Figure 5(d)), which could lead to new technological opportunities such as designing marine surfaces for enhanced drag-reduction. If the solid surface is covered by disconnected nanobubbles, instead of a continuous thin film, such as the case of gas entrapped within a series of corrugated ridges (Figure 6: inset), then the effective slip length b_{eff} of the surface is a

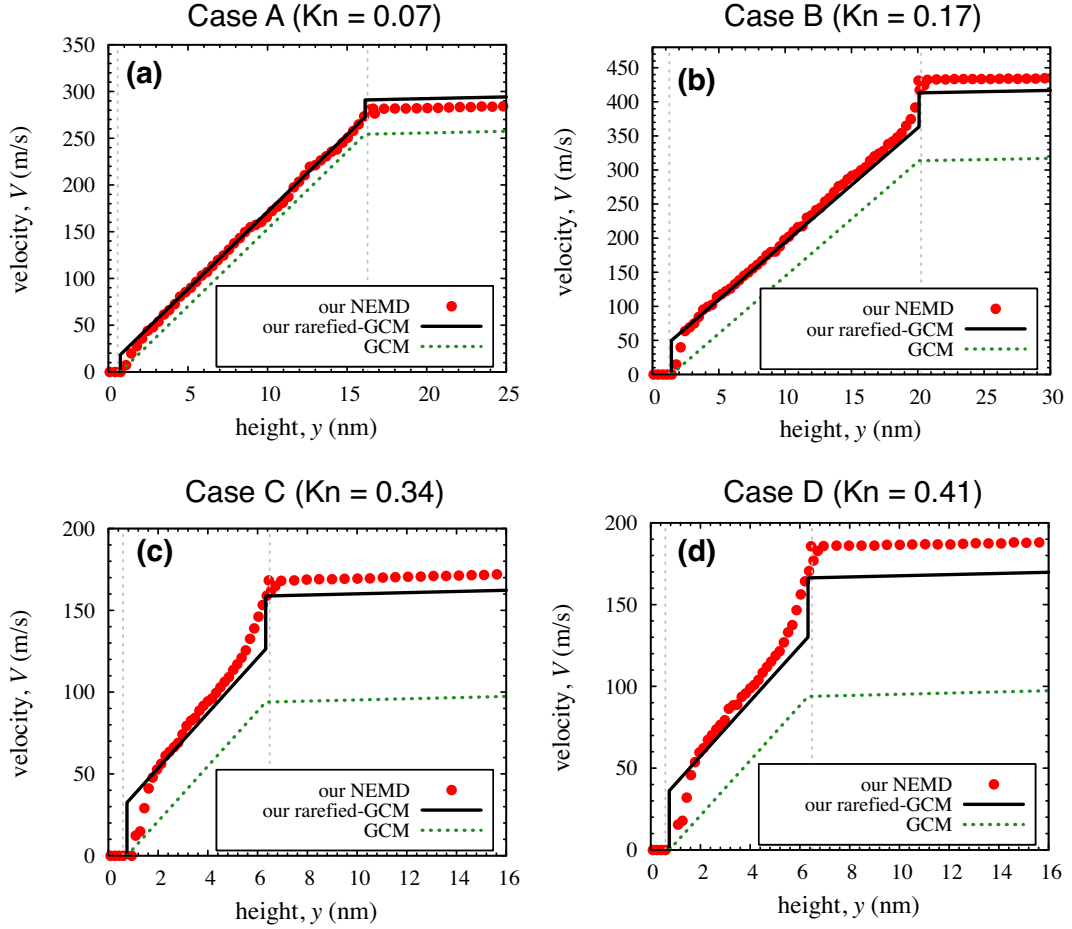


FIG. 4. Steady state velocity profiles in the y -direction for cases A–D for various Knudsen numbers as indicated. NEMD results are compared with the expected steady-state velocity profiles from the GCM and our r-GCM.

combination of the intrinsic slip lengths of the solid/liquid (b_{sl}) and the gas/liquid (b_{gl}) interfaces, approximated by:

$$\frac{1}{b_{\text{eff}}} = \frac{\zeta}{b_{gl}} + \frac{1-\zeta}{b_{sl}}, \quad (15)$$

for $b_{sl} > 0$ and $b_{sl}, b_{gl} > L/10$, where ζ is the gas-surface coverage and L is the distance between the solid ridges [10, 11]. Several experiments on smooth hydrophobic surfaces have shown that the slip length b_{sl} does not exceed 100 nm [36–39], which means that bubble coverage plays a substantial role in the overall effective slip length of the surface, according to the form of equation (15). Only surfaces with bubble coverage greater than 95% ($\zeta = 0.95$) produce effective slip lengths which are as large as those seen locally at gas/liquid interfaces; at lower bubble coverage, b_{eff} rapidly approaches b_{sl} , making the presence of bubbles ineffective at reducing drag. Our results in Figure 6 however show that the effective slip length calculated using the GCM deviates from that using the r-GCM when incorporated in the mixed hydrodynamic model of equation (15), and this error depends on the Knudsen number. Whether entrapped gas with a very large surface coverage, or thin films completely covering a surface, can be generated and be stable at the nanoscale with low gas density remains an open problem, and would need further investigation.

V. CONCLUSIONS

From fundamental results in gas kinetic theory, we have derived a new theoretical model to estimate apparent slip lengths of shear-driven flows over gas nanofilms. For these nanoscale flow problems, the standard gas-cushion model (GCM) and the de Gennes model are each applicable only at extreme ends of the Knudsen number scale. We used non-

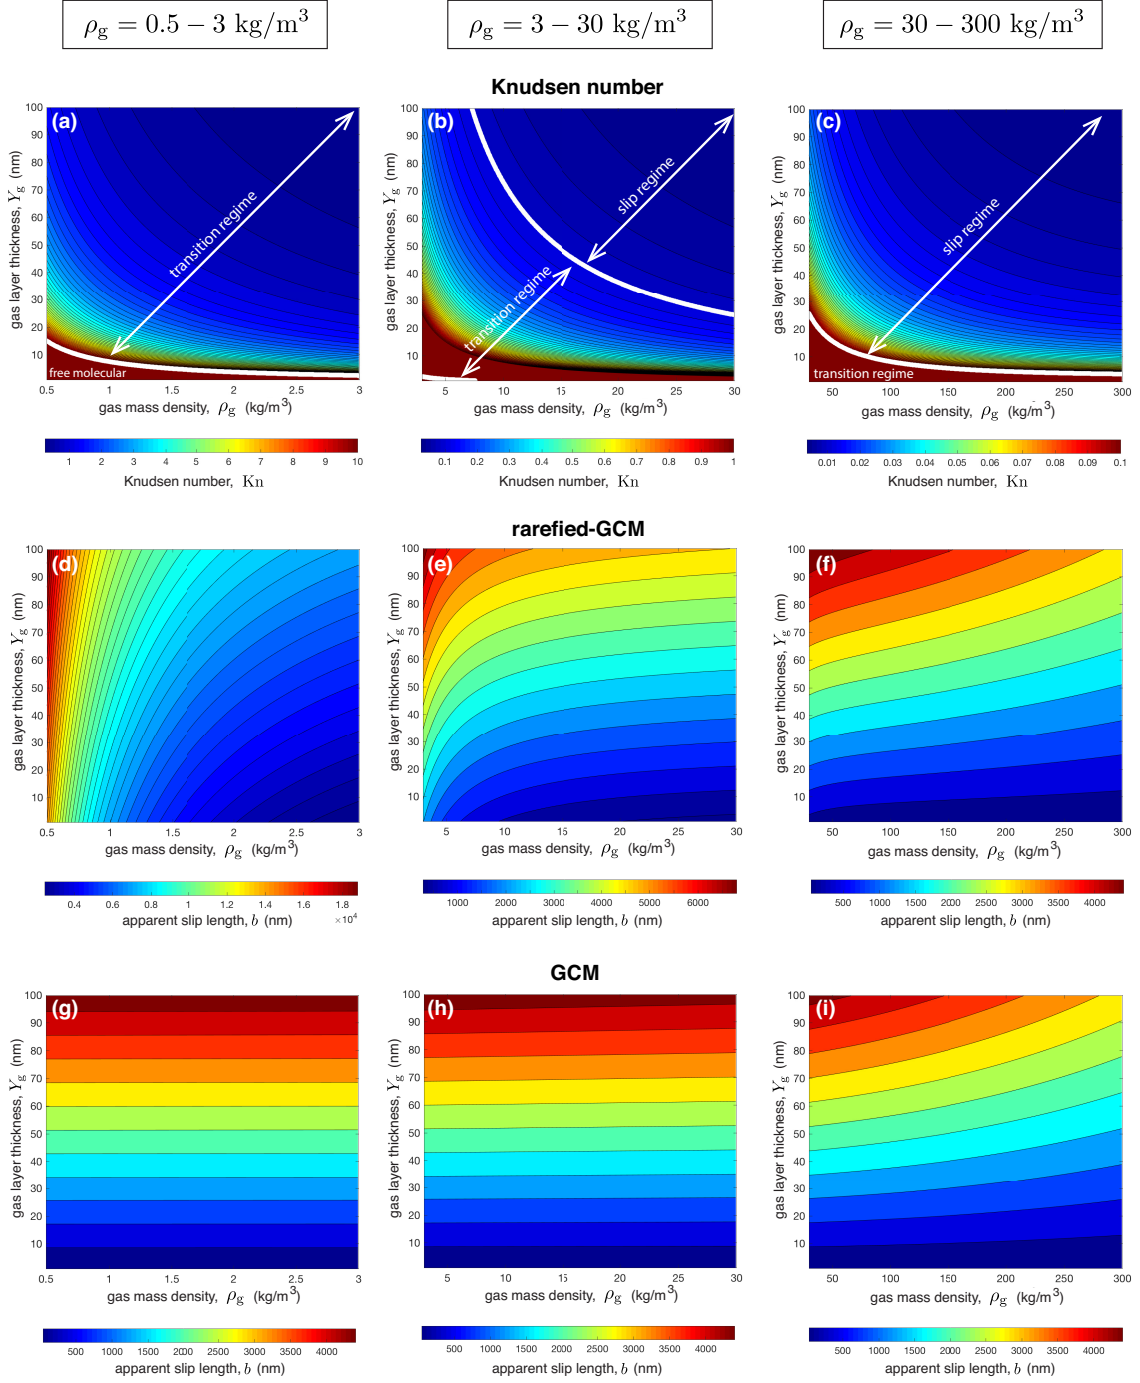


FIG. 5. Contour plots for a gas film at a liquid/solid interface, for three ranges of gas densities as indicated, and gas nanofilm thicknesses $Y_g < 100$ nm: (a)–(c) the Knudsen number in the gas, (d)–(f) the apparent slip length calculated by the r-GCM, and (g)–(i) the apparent slip length calculated by the GCM.

equilibrium molecular dynamics (NEMD) simulations to investigate water flows over gas nanofilms of varying thickness and Knudsen number, and these results compare favourably with calculations using the new rarefied gas-cushion model (r-GCM), as well as demonstrating that the GCM is not accurate outside the gas continuum or slip regimes. We showed that the r-GCM is surprisingly effective over a wide range of Knudsen numbers, although validation in the upper part of the transition regime and into the free-molecular regime is computationally intractable. In such cases, and to verify the flow behaviour for lower gas densities and larger gas film thicknesses, we suggest performing hybrid

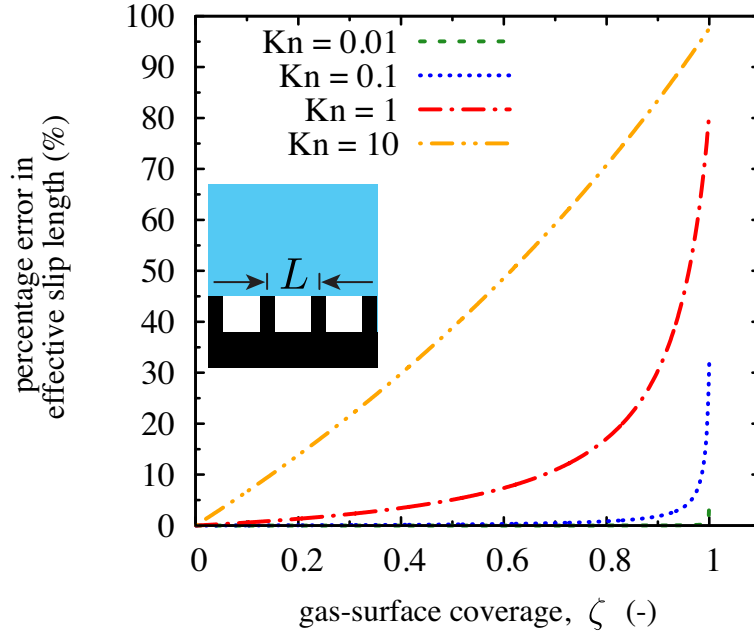


FIG. 6. Percentage error in the effective slip length (between the r-GCM and GCM) for flow over gas nano films entrapped on a corrugated surface (inset) as a function of gas coverage ζ and Knudsen number. The effective slip length is calculated using equation (15) with $b_{sl} = 60$ nm (e.g. for graphene [35]) and b_{gl} obtained from the r-GCM and the GCM for intrinsic slip with a zero mass flux constraint, i.e. equations (A.5) and (A.6), respectively.

NEMD/kinetic simulations of these nanofilms or nanobubbles (e.g. using the direct simulation Monte Carlo technique for the bulk gas region, with NEMD at the interfaces) to provide further testing of our theoretical model. The r-GCM, and the contour plots presented in the discussion section of this paper, can support any future experimental investigations in this research area.

ACKNOWLEDGEMENTS

This work is supported in the UK by the Engineering and Physical Sciences Research Council (EPSRC) under grants EP/K038621/1, EP/K038664/1, and EP/N016602/1. MKB and JMR would also like to acknowledge the ARCHER Leadership grant which enabled the molecular dynamics simulations to be run on ARCHER, the UK's national supercomputing service. Supporting data are available open access at: <http://dx.doi.org/10.7488/ds/2071>.

-
- [1] E. Lauga and M. P. Brenner. Dynamic mechanisms for apparent slip on hydrophobic surfaces. *Physical Review E*, 70(2): 026311, 2004.
 - [2] D. Li, D. Jing, Y. Pan, B. Bhushan, and X. Zhao. Study of the relationship between boundary slip and nanobubbles on a smooth hydrophobic surface. *Langmuir*, 32(43):11287–11294, 2016.
 - [3] D. C. Tretheway and C. D. Meinhardt. A generating mechanism for apparent fluid slip in hydrophobic microchannels. *Physics of Fluids*, 16(5):1509–1515, 2004.
 - [4] A. M. J. Davis and E. Lauga. Geometric transition in friction for flow over a bubble mattress. *Physics of Fluids*, 21(1): 011701, 2009.
 - [5] O. I. Vinogradova. Drainage of a thin liquid film confined between hydrophobic surfaces. *Langmuir*, 11(6):2213–2220, 1995.
 - [6] T. V. Nizkaya, E. S. Asmolov, and O. I. Vinogradova. Gas cushion model and hydrodynamic boundary conditions for superhydrophobic textures. *Physical Review E*, 90(4):043017, 2014.
 - [7] A. Busse, N. D. Sandham, G. McHale, and M. I. Newton. Change in drag, apparent slip and optimum air layer thickness for laminar flow over an idealised superhydrophobic surface. *Journal of Fluid Mechanics*, 727:488–508, 2013.

- [8] T. V. Nizkaya, A. L. Dubov, A. Mourran, and O. I. Vinogradova. Probing effective slippage on superhydrophobic stripes by atomic force microscopy. *Soft Matter*, 12(33):6910–6917, 2016.
- [9] S. G. Jennings. The mean free path in air. *Journal of Aerosol Science*, 19(2):159–166, 1988.
- [10] C. Cottin-Bizonne, C. Barentin, É. Charlaix, L. Bocquet, and J.-L. Barrat. Dynamics of simple liquids at heterogeneous surfaces: molecular-dynamics simulations and hydrodynamic description. *The European Physical Journal E*, 15(4):427–438, 2004.
- [11] S. C. Hendy and N. J. Lund. Effective slip boundary conditions for flows over nanoscale chemical heterogeneities. *Physical Review E*, 76(6):066313, 2007.
- [12] O. I. Vinogradova and A. V. Belyaev. Wetting, roughness and flow boundary conditions. *Journal of Physics: Condensed Matter*, 23(18):184104, 2011.
- [13] J. P. Rothstein. Slip on superhydrophobic surfaces. *Annual Review of Fluid Mechanics*, 42(1):89–109, 2010.
- [14] P. G. de Gennes. On fluid/wall slippage. *Langmuir*, 18(9):3413–3414, 2002.
- [15] S. C. Hendy and N. J. Lund. Effective slip lengths for flows over surfaces with nanobubbles: the effects of finite slip. *Journal of Physics: Condensed Matter*, 21(14):144202, 2009.
- [16] J. C. Maxwell. On stresses in rarified gases arising from inequalities of temperature. *Philosophical Transactions of the Royal Society of London*, 170:231–256, 1879.
- [17] B.-Y. Cao, J. Sun, M. Chen, and Z.-Y. Guo. Molecular momentum transport at fluid-solid interfaces in MEMS/NEMS: A Review. *International Journal of Molecular Sciences*, 10(11):4638–4706, 2009.
- [18] T. V. Nizkaya, E. S. Asmolov, and O. I. Vinogradova. Flow in channels with superhydrophobic trapezoidal textures. *Soft Matter*, 9:11671–11679, 2013.
- [19] R. Battino, T. R. Rettich, and T. Tominaga. The solubility of nitrogen and air in liquids. *Journal of Physical and Chemical Reference Data*, 13(2):563–600, 1984.
- [20] K. W. Bewig and W. A. Zisman. The wetting of gold and platinum by water. *The Journal of Physical Chemistry*, 69(12):4238–4242, 1965.
- [21] J. Zhang, M. K. Borg, K. Sefiane, and J. M. Reese. Wetting and evaporation of salt-water nanodroplets: A molecular dynamics investigation. *Physical Review E*, 92(5):052403, 2015.
- [22] J. Zhang, M. K. Borg, K. Ritos, and J. M. Reese. Electrowetting controls the deposit patterns of evaporated salt water nanodroplets. *Langmuir*, 32(6):1542–1549, 2016.
- [23] E. Lemmon, M. McLinden, and D. Friend. Thermophysical properties of fluid systems. In P. Linstrom and W. Mallard, editors, *NIST Chemistry webbook, NIST Standard reference database*, volume 69. National Institute of Standards and Technology, 1998.
- [24] J. L. F. Abascal and C. Vega. A general purpose model for the condensed phases of water: TIP4P/2005. *The Journal of Chemical Physics*, 123(23):234505, 2005.
- [25] Y. Boutard, P. Ungerer, J. M. Teuler, M. G. Ahunbay, S. F. Sabater, J. Pérez-Pellitero, A. D. Mackie, and E. Bourasseau. Extension of the anisotropic united atoms intermolecular potential to amines, amides and alkanols: Application to the problems of the 2004 Fluid Simulation Challenge. *Fluid Phase Equilibria*, 236(1–2):25–41, 2005.
- [26] P. M. Agrawal, B. M. Rice, and D. L. Thompson. Predicting trends in rate parameters for self-diffusion on FCC metal surfaces. *Surface Science*, 515(1):21–35, 2002.
- [27] H. A. Lorentz. Ueber die Anwendung des Satzes vom Virial in der kinetischen Theorie der Gase. *Annalen der Physik*, 248(1):127–136, 1881.
- [28] M. K. Borg, D. A. Lockerby, and J. M. Reese. The FADE mass-stat: A technique for inserting or deleting particles in molecular dynamics simulations. *The Journal of Chemical Physics*, 140(7):074110, 2014.
- [29] M. K. Borg, G. B. Macpherson, and J. M. Reese. Controllers for imposing continuum-to-molecular boundary conditions in arbitrary fluid flow geometries. *Molecular Simulation*, 36(10):745–757, 2010.
- [30] M. A. González and J. L. F. Abascal. The shear viscosity of rigid water models. *The Journal of Chemical Physics*, 132(9):096101, 2010.
- [31] G. B. Macpherson and J. M. Reese. Molecular dynamics in arbitrary geometries: Parallel evaluation of pair forces. *Molecular Simulation*, 34(1):97–115, 2008.
- [32] D. Lohse and X. Zhang. Surface nanobubbles and nanodroplets. *Reviews of Modern Physics*, 87(3):981–1035, 2015.
- [33] H. Peng, G. R. Birkett, and A. V. Nguyen. Origin of interfacial nanoscopic gaseous domains and formation of dense gas layer at hydrophobic solid-water interface. *Langmuir*, 29(49):15266–15274, 2013.
- [34] Z. Che and P. E. Theodorakis. Formation, dissolution and properties of surface nanobubbles. *Journal of Colloid and Interface Science*, 487:123–129, 2017.
- [35] S. K. Kannam, B. D. Todd, J. S. Hansen, and P. J. Daivis. How fast does water flow in carbon nanotubes? *The Journal of Chemical Physics*, 138(9):094701, 2013.
- [36] O. I. Vinogradova and G. E. Yakubov. Dynamic effects on force measurements. 2. Lubrication and the atomic force microscope. *Langmuir*, 19(4):1227–1234, 2003.
- [37] C. Cottin-Bizonne, B. Cross, A. Steinberger, and E. Charlaix. Boundary slip on smooth hydrophobic surfaces: Intrinsic effects and possible artifacts. *Physical Review Letters*, 94(5):056102, 2005.
- [38] L. Joly, C. Ybert, and L. Bocquet. Probing the nanohydrodynamics at liquid-solid interfaces using thermal motion. *Physical Review Letters*, 96(4):046101, 2006.
- [39] O. I. Vinogradova, K. Koynov, A. Best, and F. Feuillebois. Direct measurements of hydrophobic slippage using double-focus fluorescence cross-correlation. *Physical Review Letters*, 102(11):118302, 2009.

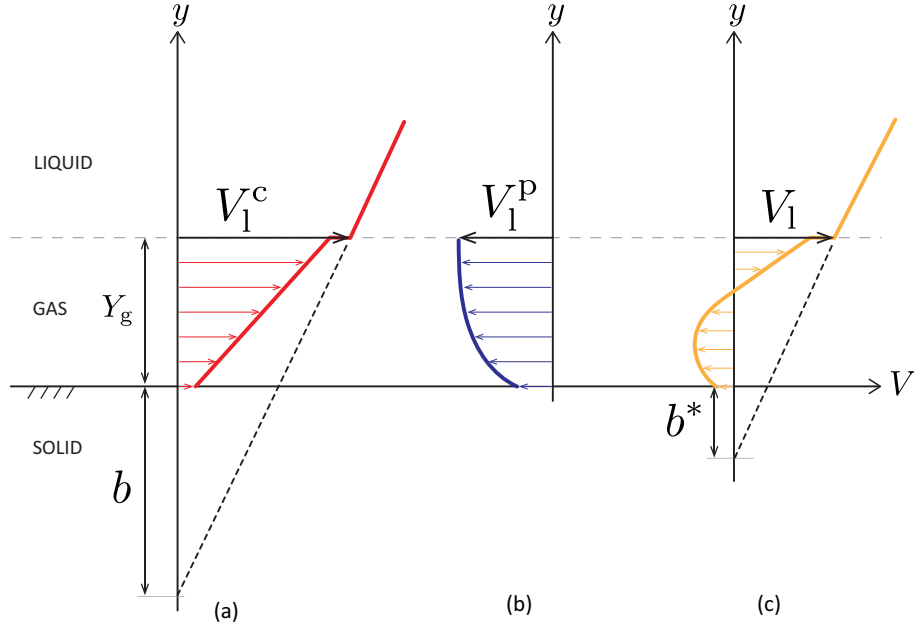


FIG. 7. Superposition of (a) Couette and (b) pressure-drive flow components produces (c) the net velocity profile in a finite gas nanofilm with zero net mass flow rate.

Appendix: Slip over finite gas nanofilms

The r-GCM equation (9) for apparent slip can be further developed for a long but finite gas nanofilm. In this case, due to mass continuity in the gas, the steady-state mass flow rate along the film must be zero, as explained by Nizkaya *et al.* [18].

For the low-speed shear-driven flows we consider, and adopting a lubrication approximation for long thin films, the in-film gas flow profile (shown in Figure 7(c)) can be constructed as a linear superposition of a Couette flow (Figure 7(a)) and a pressure-driven flow (Figure 7(b)) that acts in the opposite direction. The volumetric gas flow rate (per unit length, transverse to the flow) of the Couette component, if $\sigma_{sg} = \sigma_{sl} = 1$, is given by:

$$Q^c = \frac{V_1^c Y_g}{2}, \quad (\text{A.1})$$

where the superscript ‘c’ denotes the Couette component. The pressure-driven velocity profile in Newtonian slip flow is parabolic, with zero shear at the gas/liquid interface. Therefore it can be shown, if $\sigma_{sg} = \sigma_{sl} = 1$, that the volumetric flow rate (per unit length) is given by:

$$Q^p = V_1^p Y_g \left(\frac{2 + 6\text{Kn}}{3 + 6\text{Kn}} \right). \quad (\text{A.2})$$

Since the net mass flow rate is zero (i.e. $Q^c + Q^p = 0$), and the velocity at the gas/liquid interface is $V_1 = V_1^c + V_1^p$, we can write

$$V_1 = V_1^c \left(\frac{1 + 6\text{Kn}}{4 + 12\text{Kn}} \right). \quad (\text{A.3})$$

Furthermore, the stress and strain at the gas/liquid interface are zero for the pressure-driven component, so it follows that the shear in the liquid in the Couette component is equal to the shear in the liquid in the total flow, i.e.

$$\frac{V_1}{Y_g + b^*} = \frac{V_1^c}{Y_g + b} \quad (\text{A.4})$$

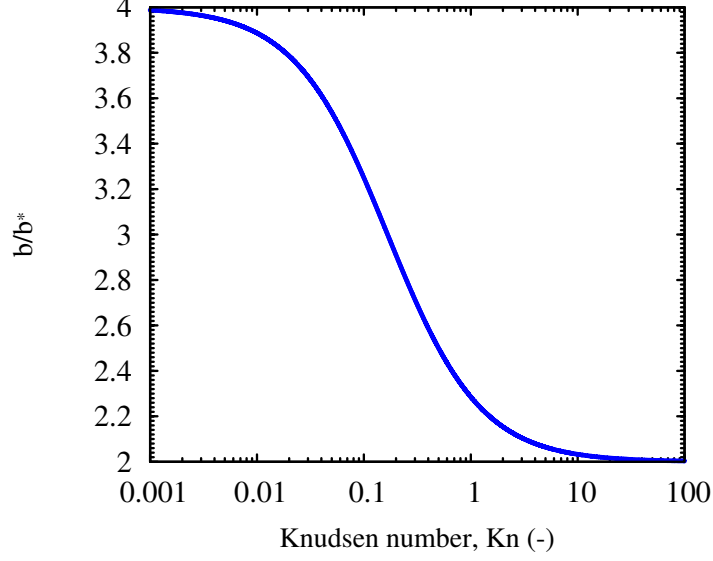


FIG. 8. The pre-factor for reduction in slip length in finite gas nanofilms as it varies with Knudsen number, given by equation (A.7).

where b^* (indicated in Figure 7(c)) is the apparent slip length with the zero-mass-flow-rate constraint, and b is the apparent slip length derived for infinite films, see equation (9); both can contain rarefied gas effects. Rearranging equation (A.4) and substituting b from equation (9), gives:

$$b^* = \left[C_\mu (2\text{Kn} + 1) \left(\frac{1 + 6\text{Kn}}{4 + 12\text{Kn}} \right) - 1 \right] Y_g. \quad (\text{A.5})$$

In the continuum limit, i.e. as $\text{Kn} \rightarrow 0$ and assuming that $C_\mu \gg 1$, equation (A.5) retrieves the slip length over entrapped gas in cavities [18], i.e.

$$b^* \approx \frac{C_\mu}{4} Y_g, \quad (\text{A.6})$$

which demonstrates that the slip is a quarter of that predicted by the GCM, i.e. $b/b^* \approx 4$. For the rarefied gas films presented in this work, the local slip ratio can be written as:

$$\frac{b}{b^*} \approx \left(\frac{4 + 12\text{Kn}}{1 + 6\text{Kn}} \right). \quad (\text{A.7})$$

If our slip model can be applied at high Kn , this indicates that for free molecular gas flow the slip for finite nanofilms is half that of an infinite film, as demonstrated in Figure 8.